
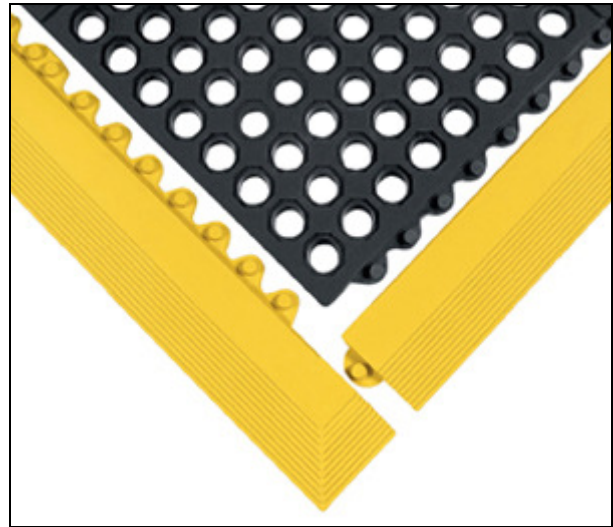


24/7 Modular Anti-Fatigue Mats

Specifications

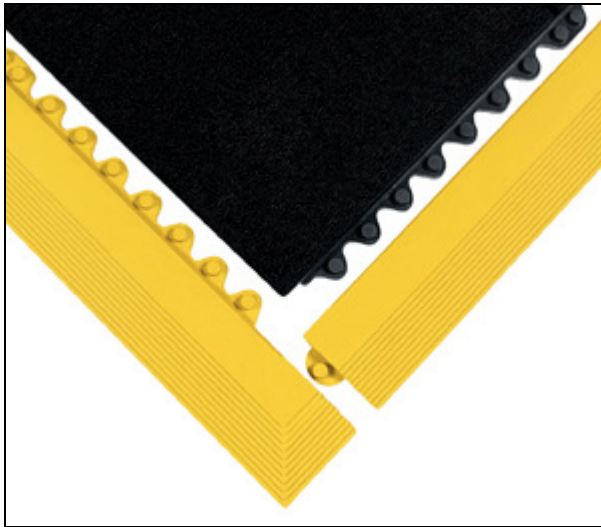

Intended Uses:

24/7 Solid Mats provide superb comfort, resulting in enhanced employee productivity and ideal for use in large and non-rectangular areas and can even be customized. These comfort mats have a grease-resistant rubber construction, which provide added traction and durability. These interlocking rubber mats are available in 3 formulas: (1) **General (All) Purpose** is designed for heavy-use areas that are exposed to everyday dirt and debris. (2) **CFR Formula** is designed for heavy-use areas that are exposed to mineral oil-based cutting fluids. (3) **NBR Formula** is designed for heavy-use areas that are exposed to petroleum-based fluids and petrochemicals. Available with Gritworks, a carbide grit surface coating for enhanced traction, on the CFR and NBR formulas. Environmental Green Rating: 33% Recycled Content.

Test Specifications and Results:

<u>SPECIFICATION</u>	<u>TEST</u>	<u>RESULTS</u>
Flammability	MVSS 302	'A' Rating
Tabor Abrasion	Federal Standard 191 Modified	1% loss
Temperature Range	Degrees	10 to 110 °F
Coefficient of Friction	ASTM F1677	Dry: = 0.78 / Wet = 0.68
Compression Deflection	Not Available	Not Available
Tear Strength	Not Available	Not Available
ESD Rating	Not Available	Not Available
Dielectric Strength	Not Available	Not Available

Details and Composition:

Uses	Comfort in wet and dry commercial locations
Colors	Black tiles; Black and Yellow borders
Sizes	Standard and custom configurations available
Compound	100% rubber
Overall Weight	3.1lbs sqft (28lbs per 3' x 3' standard tile)
Durometer per ASTM D2240	55
Edges	Interlocking safety beveled edging available
Thickness	5/8"
Warranty	3 Year
Green Rating	>33% Post Industrial
Performance	Good
Anti-Fatigue Value	★★★★☆
Wear / Slip Resistance	★★★★☆
Ease of Maintenance	★★★★☆

Cleaning Recommendations

Sweep regularly, vacuum as needed for general dirt and debris. These mats can be wet mopped with mild soap or detergent. For best results use a detergent like Ivory Liquid with a ph between 4.0 – 9.0.

Limited Warranty

The materials and workmanship used in the construction of 24/7 Modular Anti-Fatigue Mats are guaranteed under normal conditions of usage for three years after the date of shipment.

If the purchaser discovers a defect in the materials or workmanship of the mat within the warranted time after the date of shipment, American Floor Mats will, at its own discretion, either i.) repair the nonconforming product, ii.) replace the product with the same or substantially similar product, or iii.) reimburse the buyer for the pro-rated purchase price of the nonconforming product.

American Floor Mats reserves the right to inspect the non-conforming mat(s) before repairing, replacing or reimbursing the buyer. Therefore, at the preference of American Floor Mats, the mats must be returned or available for on-site inspection. Modifying or installing the mat may void the warranty.

To the maximum extent permitted by law, American Floor Mats' liability shall not exceed the purchase price of the product; American Floor Mats shall not be liable for any incidental, consequential, special, and indirect or punitive damages (including without limitation, damages from lost business, profits or goodwill).

Chemical Resistance:

KEY

A = Performs well **B** = Slightly affected **C** = Moderately affected
D = Highly affected **U** = Not recommended **NT** = Not tested

Chemical	Urethane	Nitrile	PVC	CFR	SBR	Natural Rubber
Acetone	U	U	U	C	C	C
Animal Fats	NT	A	C	U	U	U
Beach Solution (10% Dilute)	NT	B	B	C	C	C
Boric Acid	B	A	A	A	A	A
Brake Fluid	U	A	B	D	D	D
Brake Fluid (Silicone Based)	U	A	B	A	B	B
Chlorine Solution (3% Dilute)	C	A	B	C	C	C
Citric Acid	NT	A	C	C	C	U
Cutting Fluid (Mineral Oil Based)	U	B	B	B	C	D
Diesel Oil	U	A	B	U	U	U
Ethylene Acetate	NT	U	NT	U	U	U
Ethylene Glycol	B	A	A	A	A	A
Hydraulic Oil (Petroleum)	U	A	B	D	D	D
Hydrochloric Acid Cole (37% Dilute)	U	C	C	B	B	B
Isopropyl Alcohol	A	B	A	B	B	A
Lacquer Solvents	U	U	U	U	U	U
Lindol (Hydraulic Fluid)	NT	U	NT	U	U	U
MEK	U	U	U	U	U	U
Mineral Oil	C	A	B	A	B	U
Naptha	NT	C	U	U	U	U
Napthlene	U	U	U	U	U	U
Petroleum	U	C	B	D	D	D
Salt Water	A	A	B	B	B	C
Tolulene	U	U	U	U	U	U
Transmission Fluid (Type A)	U	B	A	C	U	U
Trichloroethane	U	U	U	U	U	U
Vegetable Oil	C	A	B	C	C	C