


Corrugated Vinyl Runner Mats

Specification Sheet

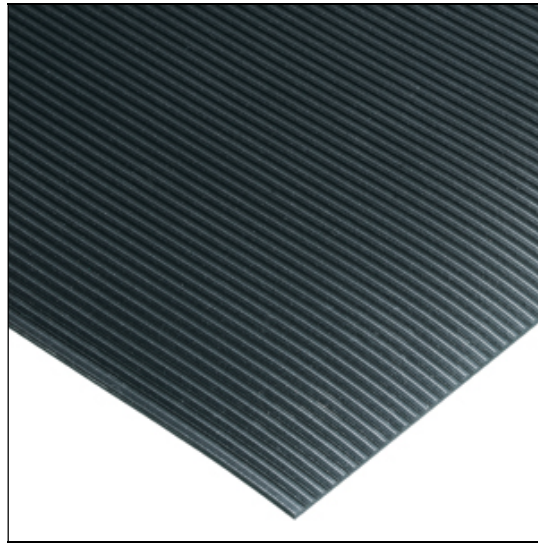

Performance	Best
Uses	Universal Indoor Applications
Compound	100% Vinyl
Coefficient of Friction	0.91 Dry / 0.65 Wet per ASTM F1677
Tabor Abrasion	< 1% lost @ 1,000 cycles per Fed. Std. 191
Flammability	"A" Rating per MVSS 302
Warranty	2 years
Temperature Range	-10° to 140° F
Tensile Strength	1000 lbs. per sq. inch per ASTM D412
Weight	1.0 Lbs / SF
Wear Resistance	★★★★★
Slip Resistance	★★★★★