


ElectroSoft Static Dissipative Mats

Specification Sheet

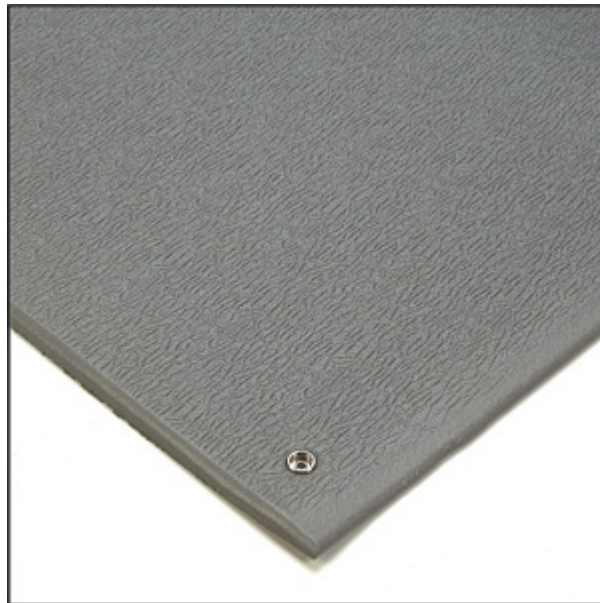

Performance	Better
Uses	Dry areas at risk for damage from static electricity
Compound	Vinyl
Coefficient of Friction	0.88 Dry per ASTM F1677
Tabor Abrasion	3% lost @ 1,000 cycles per Fed. Std. 191
Flammability	"A" Rating per MVSS 302
Warranty	1 years
Anti-Fatigue Value	3.5
Wear Resistance	2
Conductivity	2
MNF	70
Thickness	3/8"
Resistivity	RTT: 1×10^9 to 9×10^9 Ohms