


## Kleensweep Runner Mats

### Specification Sheet

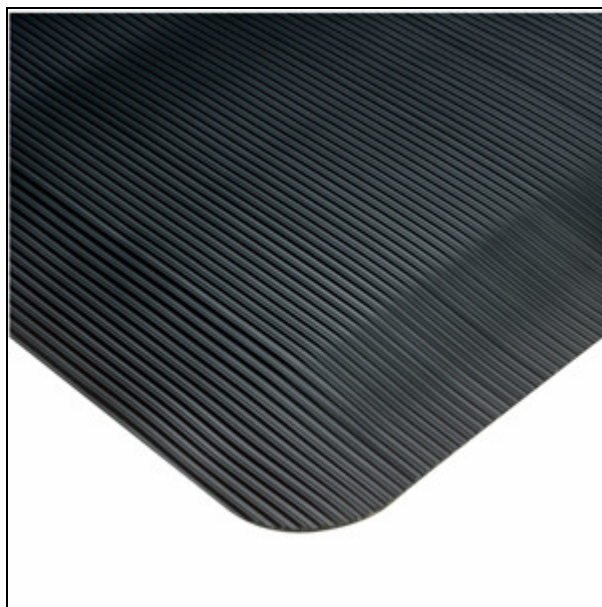

<b>Performance</b>	Good
<b>Uses</b>	Universal Indoor Applications
<b>Compound</b>	100% Vinyl
<b>Coefficient of Friction</b>	0.90 Dry / 0.62 Wet per ASTM F1677
<b>Tabor Abrasion</b>	< 1% lost @ 1,000 cycles per Fed. Std. 191
<b>Flammability</b>	"A" Rating per MVSS 302
<b>Warranty</b>	1 years
<b>Compression</b>	100% Vinyl inches @ 35 PSI per ASTM D575
<b>Tensile Strength</b>	1000 lbs. per sq. inch per ASTM D412
<b>Wear Resistance</b>	4
<b>Slip Resistance</b>	4