


WorkSafe Anti-Fatigue Mats

Specifications

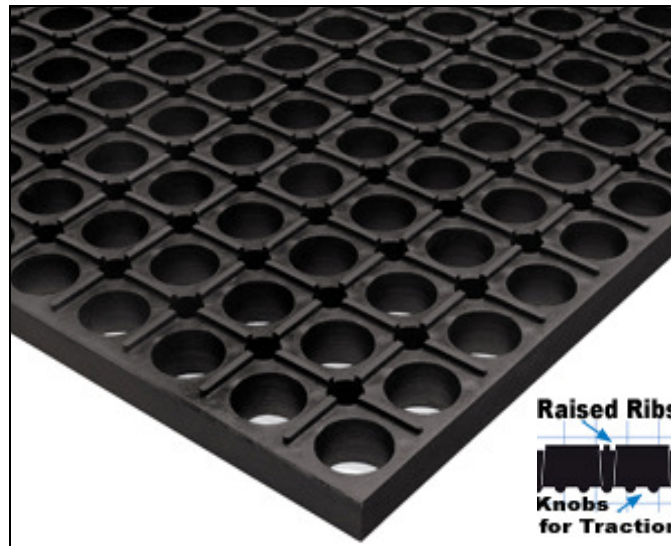

Specifications

Uses	Wet and dry areas
Colors	Black; Black w/ Yellow Borders; Black w/ Orange Borders
Compound	100% Natural rubber
Tabor Abrasion (% Lost @ 1,000 Cycles per Fed. Std. 191	1% lost
Durometer per ASTM D2240	55
Coefficient of Friction per ASTM F1677	.83 Dry, .14 Wet
Edges	Safety beveled on all 4 sides
Thickness	7/8"
Warranty	1 Year
Green Rating	>33% Post Industrial

- **Space between large holes= 5/16"**
- **Large holes = 7/8" in diameter; there are 100 large holes/sq. ft.**
- **Mud scrapers - 13/16" in length, 2/16" in width and 1/16" in height.**
- **Space between large holes = 7/16"**
- **Small holes = 3/8" in diameter; there are 81 small holes/sq. ft.**